

HOW TO CLEAN YOUR COVER ON THE VEHICLE (for 200 or 380 Series, Dustop, Evolution and NOAH)

- 1 - Install your cover inside-out on the vehicle.
- 2 - Mix one ounce (1oz) of Simple Green All-Purpose Cleaner per quart of WARM water.
- 3 - Spray or sponge the mixture onto the cover.
- 4 - Rinse with plain water until there are no suds on the cover.
- 5 - Air dry the cover.

Simple Green All-Purpose Cleaner is available in most automotive and home improvement stores. If you have questions about Simple Green, call 1-800-228-0709, or visit www.simplegreen.com for more information.

OPTIONAL SECURITY DEVICE

Your new cover is equipped with plastic (non-scratch) grommets, reinforced into the bottom edge on both sides of the cover. A plastic-coated, steel cable with padlock and keys is available to lock through the grommets and secure the cover to the vehicle. Consult your dealer for availability.

Gust Guard® is an option for use in areas where wind may lift and/or blow a cover off a vehicle. The kit includes two sets of hem clamps and two 7 foot lengths of cord. The clamps are placed on both sides of the vehicle in front of the front tires and behind the rear tires. The cord is then affixed to a clamp on one side of the vehicle and secured to the clamp on the opposite side to help reduce movement of the cover. Please see **WARNING FOR USE IN HIGH WIND AREAS** for more information.

An added theft deterrent is the application of large letters on the sides of the cover. Print your name or license number on the cover to make it uninviting to a prospective thief. (**Note - see warning for use of ink and markers**).

LIMITED WARRANTY

Covers are warranted from date of purchase to the original purchaser. Save your receipt! Warranty coverage protects against defects in material and workmanship, as well as the fabric becoming unserviceable during normal use. After factory inspection, we will repair or replace the cover or specific panels judged to be unusable. Covers are **not** warranted against fading, which occurs naturally on all products used outdoors. These fabrics are not waterproof - all are breathable to allow moisture, condensation and heat to escape from under the fabric.

To process a warranty claim, first contact the authorized dealer where you purchased your cover.

Fabric

Fabric	Warranty
Polycotton	90 Days
Flannel	90 Days
Fleeced Satin	2 Years
Dustop®	4 Years
Form-Fit®	4 Years
ViewShield™	4 Years
Grafix Series™ Evolution Daisy Print	4 Years
Grafix Series™ (except Daisy Print)	3 Years
200 Series	2 Years
380 Series	3 Years
Reflec'tect®	3 Years
Evolution®	4 Years
NOAH®	4 Years
WeatherShield®HP	4 Years
Ultra'tect®	5 Years
Sunbrella®	6 Years
WeatherShield®HD	6 Years

If you have additional questions, please contact:

Covercraft Industries, Inc. 100 Enterprise Blvd., Pauls Valley, OK 73075
800-426-8377 M-F 8AM to 4PM CST / sales@covercraft.com / www.covercraft.com

OTHER RESOURCES



www.covercraft.com/blog



www.twitter.com/covercraft1965



www.facebook.com/covercraft



www.youtube.com/covercraft1965

Printed in USA

Form # 1360011 (rev5-20)

COVERCRAFT®

SINCE 1965

COVER CARE & USE INSTRUCTIONS


Your new cover is manufactured with a quality fabric, selected for its performance characteristics. Depending on the material you chose, it can provide protection against most natural elements and can be used for storing vehicles outside, and indoors as well. Some fabrics are designed to be UV resistant, some have special finishes to help shed moisture, dust, dirt, bird droppings, tree sap and grime. Indoor fabrics provide good breathability and varying degrees of softness and dust resistance. "Covercraftsmanship" is put into every cover we make!

If your vehicle has an outside radio antenna which will not retract flush with the vehicle body, you will have to provide an opening in the cover. We have included a noncorrosive plastic grommet set to reinforce the antenna opening.

1) To make the most accurate antenna grommet opening, remove the antenna and install the cover on the vehicle, making sure it is properly aligned and positioned. Using a sharp pencil, punch a hole through the fabric at the antenna location. Be careful to avoid hitting the vehicle finish with the pencil. If the antenna is not easily removed, see procedure #2.

2) Place the cover on the vehicle **except** for the fender or body panel where the antenna is located. For example, if the antenna is located on the front passenger side fender, roll or fold the cover away from the antenna and cover the remainder of the vehicle. (**Do not** attempt to place the cover over the top of the antenna.) Center the cover, align both seams with the roof edges and be sure the cover is pulled down evenly over the front and rear bumpers. Carefully unfold the portion of the cover that is next to the antenna and position it next to the base of the antenna. Recheck the overall positioning of the cover to be certain it has not moved on the vehicle. Make sure the cover lies flat over the hood and roof areas of the vehicle. Mark the cover with the location of the antenna base and make a hole with a sharp pencil.


Use sharp scissors to make the hole opening 3/4 inch in diameter and install the grommet as shown in the diagram to the right. The outside grommet ring fit is very tight. Place the cover on a CLEAN hard surface, position the inside grommet through the opening you made and then secure the outside grommet snap-ring in place using a rubber mallet. Do **NOT** use excessive force or the ring can be damaged. Do **NOT** install the grommet with the cover on the vehicle.

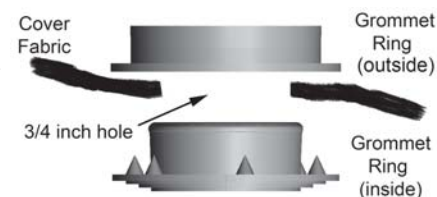

IMPORTANT - When installing the cover, remember to place it over the antenna before putting the mirror pockets over the mirrors.

INSTALLATION

The front of the cover is marked with a pattern number and/or logo and the word "front" to help in positioning the cover on the vehicle. If your cover is equipped with mirror pockets (most late-model custom-fit patterns only), it is **very important** that the mirror pockets be placed **over the side mirrors before** the ends of the cover are stretched over the front and rear bumpers. (see drawing at right)

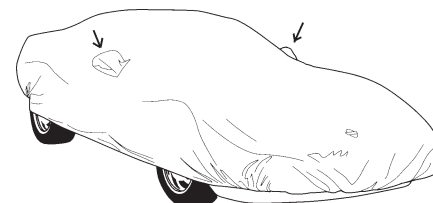

FABRIC CHART	WASHING			DRYING		
	Machine Type	Cleaner	Water Temp	Machine		Air Dry
				Hot	Medium	
Polycotton	H or C	PD or SG	Cold		X	
Flannel	H or C	PD or SG	Cold		X	
Fleeced Satin	H or C	PD or SG	Warm		X	
Dustop™	C	SG	Cold			X
Form-Fit®	H or C	PD or SG	Warm		X	
200 Series	C	SG	Cold			X
380 Series	C	SG	Cold			X
Reflec'tect®	C	SG	Cold			X
Evolution®	C	SG	Cold			X
NOAH®	C	SG	Cold			X
WeatherShield® HP	H or C	PD	Warm		X	
Ultra'tect®	H or C	SG	Warm		X	
Sunbrella®	C	SG	Warm		X	
WeatherShield® HD	H or C	PD	Warm		X	
ViewShield™	H or C	PD	Warm		X	
Grafix™	H or C	PD	Warm		X	

Machine Type: H = Large home-sized top or front load, with or without agitator
C = Commercial or Large home front load, no agitator

Cleaner: PD = Mild Powder Detergent (dissolve first) , No Bleach or Fabric Softener
SG = Simple Green, dilute 1/4 cup in 1 cup of water