


## Grommet Installation

*If your vehicle has an outside radio antenna which will not retract flush with the vehicle body, you will have to provide an opening in the cover. We have included a non-corrosive plastic grommet set with your cover.*

### Removable Antenna


- Remove the antenna.
- Install cover on the vehicle.
- Check cover is aligned correctly.
- Using a sharp pencil punch a hole through the fabric at the antenna location.
- Using sharp scissors, make the hole opening 3/4" in diameter and install grommet. The outside grommet ring fit is very tight.
- Place the cover on a clean, hard surface. Position the inside grommet through the opening you made and then secure the outside grommet snap-ring in place using a rubber mallet.

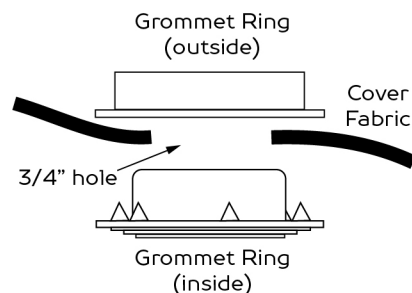


### Non-Removable Antenna

- Place the cover on the vehicle except for the fender or body panel where the antenna is located.
- Center the cover, align both seams with the roof edges and be sure the cover is pulled down evenly over the front and rear bumpers.
- Carefully unfold the portion of the cover that is next to the antenna and position it next to the base of the antenna.
- Recheck the overall positioning of the cover to make sure it has not moved.
- Make sure the cover lies flat over the hood and roof areas of the vehicle and mark the cover with the location of the antenna base and make a hole with a sharp pencil.
- Using sharp scissors, make the hole opening 3/4" in diameter and install grommet. The outside grommet ring fit is very tight.
- Place the cover on a clean, hard surface. Position the inside grommet through the opening you made and then secure the outside grommet snap-ring in place using a rubber mallet.


## Car Cover Installation

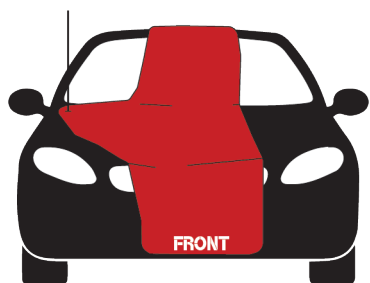

- Lay cover over vehicle with the front facing you. The front will be marked with either an ID or logo. (ID may be located on the inside front of the cover)
- *Make sure if using a grommet that the antenna is placed through the cover before proceeding.*

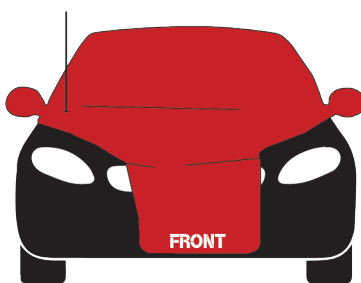

- Place mirror pockets over mirrors.

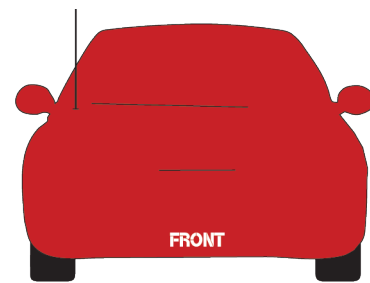

- Stretch cover over the front and rear bumpers.

### TIPS

- To extend the life of your cover place vinyl tape over any areas exposed to severe abrasion.
- If installing cover after driving be careful not to let the cover come in contact with hot exhaust pipe.
- A tie-down rope is included and can be used to tighten the bottom of the cover through the loops sewn under the driver and passenger side doors.

## Car Cover Removal

- Release both ends of the cover from under the bumpers.
- Fold up both sides onto the top of the vehicle into a long pile approximately 2 feet(60cm) wide.
- Start at the front of the vehicle & fold the cover in 3 foot(1 meter) folds from the front to the back

**Scan code on phone or tablet to view full detailed car cover installation video:**



### Cleaning Instructions

- Place the cover in the largest washing machine available. Extra-large covers (for vehicles such as SUV's and pickup trucks), in any fabric, should always be washed in large commercial front load machines.
- If available, use the GENTLE cycle.
- Based on your cover fabric, use the cleaning chart below and wash with the appropriate cleaner and washing machine settings.  
NEVER USE FABRIC SOFTNER
- Rinse the cover TWICE (2x) with water only to remove all the cleaner.
- Dry according to the fabric chart.

| FABRIC                                                                                                                                        | WASHING      |         |            | DRYING      |         |
|-----------------------------------------------------------------------------------------------------------------------------------------------|--------------|---------|------------|-------------|---------|
|                                                                                                                                               | Machine Type | Cleaner | Water Temp | Machine Dry | Air Dry |
| Gray Polycotton                                                                                                                               | H or C       | PD      | Warm       | Low         |         |
| Tan Flannel                                                                                                                                   | H or C       | PD      | Warm       | Low         |         |
| Covercraft® 5 Layer All Climate Softback Outdoor                                                                                              | C            | PD      | Cold       |             | X       |
| Covercraft® 5 Layer Softback Indoor                                                                                                           | C            | PD      | Cold       |             | X       |
| Form Fit®                                                                                                                                     | H or C       | PD      | Cold       |             | X       |
| ReflecTect®                                                                                                                                   | H or C       | PD      | Warm       | Low         |         |
| Covercraft® 3 Layer Moderate Climate Outdoor                                                                                                  | C            | PD      | Cold       |             | X       |
| WeatherShield®HP                                                                                                                              | H or C       | PD      | Cold       | Medium      |         |
| UltraTect®                                                                                                                                    | H or C       | PD      | Cold       |             | X       |
| Sunbrella®                                                                                                                                    | C            | PD      | Cold       |             | X       |
| WeatherShield®HD                                                                                                                              | H or C       | PD      | Cold       |             | X       |
| <b>MACHINE TYPE:</b> H = Large home-sized top or front load, with or without agitator<br>C = Commercial or Large home front load, no agitator |              |         |            |             |         |
| <b>CLEANER:</b> PD = Mild Powder Detergent [dissolve first], No Bleach or Fabric Softner                                                      |              |         |            |             |         |

### Limited Warranty

Covers are warranted from date of purchase to the original purchaser. Save your receipt! Warranty coverage protects against defects in material and workmanship, as well as the fabric becoming unserviceable during normal use. After factory inspection, we will repair or replace the cover or specific panels judged to be unusable. Covers are NOT warranted against fading, which occurs naturally on all products used outdoors. These fabrics are not waterproof - all are breathable to allow moisture, condensation, and heat to escape from under the fabric.

### IMPORTANT WARNINGS - PLEASE READ BEFORE USING COVER!

**WARNING TO OWNERS OF REPAINTED VEHICLES:** Use of a cover on any recently-painted surface may cause damage to that surface! If your vehicle has been repainted, check with the painter or body shop on the specifics of how and when you can use this cover.

**WARNING FOR USE IN HIGH WIND AREAS:** In high wind areas (and for extended storage), use the loops and rope provided to securely pull the cover tight under the center of the car. This should be done even if the optional lock and cable is being used. The cover is NOT designed to replace a garage and should be checked for flapping in high winds. If wind gets under the cover, it can cause it to work loose and come off the vehicle, or damage the cover.

**WARNING FOR FREEZING WEATHER:** In very rare cases when a heavy rainstorm is followed by an extreme temperature drop to below freezing, it is possible for the cover to become frozen to a layer of ice created between the vehicle body and the cover. DO NOT attempt to remove the cover if this happens. If it is necessary to remove the cover, we recommend pouring warm water over the vehicle and slowly removing the cover, taking care to inspect the surfaces of both the cover and the vehicle during the removal process. Stop immediately if you encounter resistance - the ice has not been melted completely and you must pour more warm water over the vehicle.

**WARNING REGARDING TOWING:** Vehicle covers are NOT designed for use when towing. Serious damage can occur to the cover and the paint surface of the vehicle if a cover is used when a vehicle is being towed. Using a cover while towing is done at your own risk!

| Fabric            | Warranty |
|-------------------|----------|
| •Polycotton       | 90 Days  |
| •Flannel          | 90 Days  |
| •Fleeced Satin    | 2 Years  |
| •Dustop®          | 4 Years  |
| •Form-Fit®        | 4 Years  |
| •380 Series       | 3 Years  |
| •Reflec'tect®     | 3 Years  |
| •NOAH®            | 4 Years  |
| •WeatherShield®HP | 4 Years  |
| •Ultra'tect®      | 5 Years  |
| •Sunbrella®       | 6 Years  |
| •WeatherShield®HD | 6 Years  |