




**DELTA TECH INDUSTRIES**  
**DELTA**  
**L I G H T S**

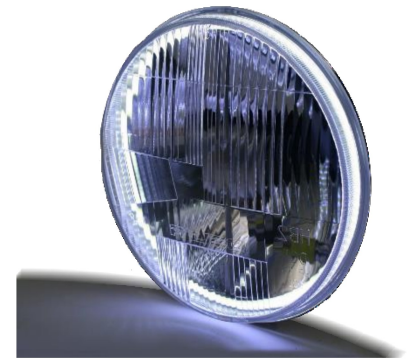

## DELTA HALO HEADLIGHT

### INSTALLATION INSTRUCTIONS

1. Check all components to ensure nothing is missing. Contents are listed on the box label and or on the website for each part number.
2. Mount new DELTA headlight on the vehicle. See mounting instruction.
3. Connect Halo terminals from the headlight to the terminals on each halo harness. (image A)
4. Route Halo harness away from high temperature areas like radiator.
5. If your halos are **WHITE**; Connect **RED** wire on each harness using supplied quick connector to any existing constant power wire, running light wire, or parking light wire, etc. (image B)
6. If your halos are **AMBER**; Connect **RED** wire on each harness using supplied quick connector to respective left and right turn signal wire. (image B)
7. Ground **BLACK** ring terminated wire on each harness to any un-painted metal surface under the hood. Use provided sheet metal screw. Combining with another ground is okay.
8. Find and clean a safe frame location for the drivers (avoid high temperature areas). Apply a double-stick tape to each driver and attach to the frame. (image C)
9. Test the Halos by either turning on the key or switch or engaging the turn signals.

