

ORACLE®

2015+ FORD MUSTANG HEADLIGHT HALO INSTALLATION GUIDE




TOOLS:



USING THE HEATING METHOD:
IF USING A HEAT GUN BEGIN BY HEATING THE SEAL EVENLY WHILE CONSTANTLY MOVING THE HEAT GUN. IF USING AN OVEN: PREHEAT TO 225°F AND PLACE THE LIGHT IN THE OVEN FOR 10 MINUTES.

OPENING THE HEADLIGHT:

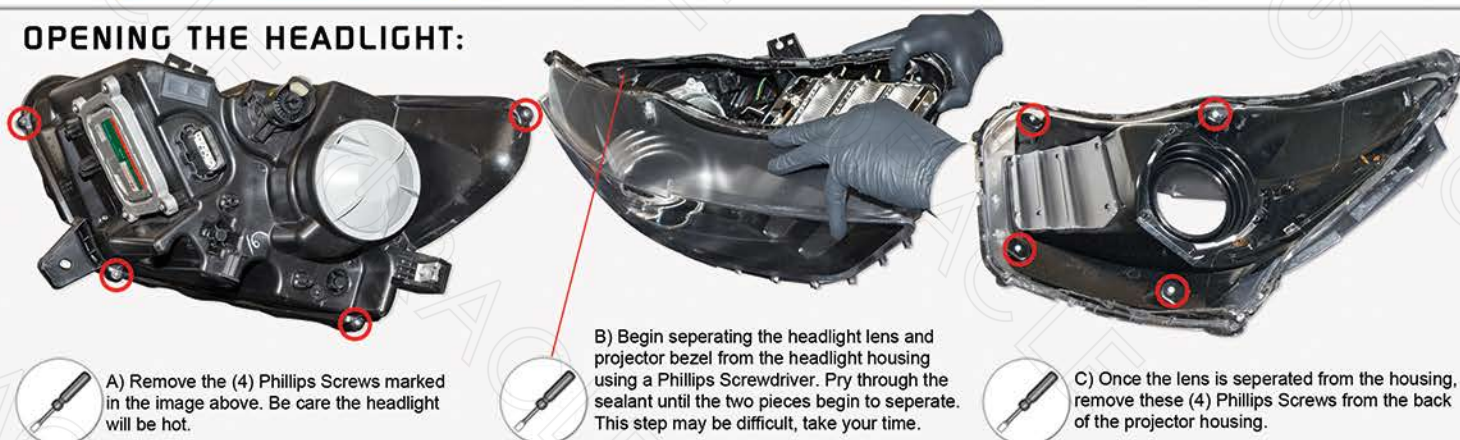

INSTALLING THE HALO RINGS:



INSTALLING THE CONCEPT DRLS:



WWW.ORACLELIGHTS.COM


INSTALLING THE CONCEPT DRLS:



J) Use a Dremel tool to remove the (6) heated plastic points to separate the stock DRL circuit boards.



K) Use a two part epoxy to mount the RGB Concept Strips onto the slots on the back of the chrome stock DRL housing. Notice the locations of where you need to apply the epoxy.

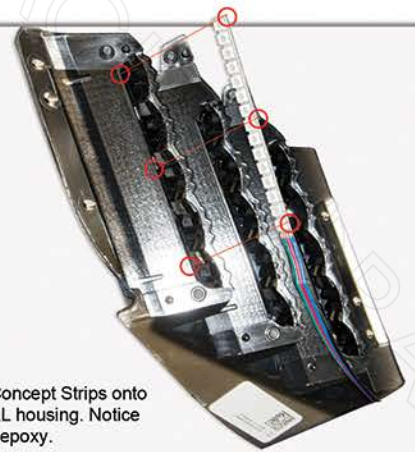

L) Once the epoxy has dried, and the Concept Strips are mounted, you can re-install the DRL housing to the black mounting bracket.



M) Now, drill a small hole on the bottom of the headlight housing. This hole should just be large enough for the halo wires and Concept Strip wires to route out of the headlight.




N) You may feed all of the wires of the Concept Strip through the drilled hole first. Re-install the (4) screws holding the DRL housing in place. Next feed the halo wires through the same drilled hole.

RE-SEALING THE HEADLIGHT:

- Make sure there is no dust or debris inside the housing
- Use compressed air to remove any debris
- Re-install any parts of the headlight that were removed
- Make sure no wires are tangled and are routed properly
- Tighten down all screws that were removed

Using ORACLE Headlight Sealant or an equivalent exterior grade silicone:

- Form a solid bead of silicone in between the headlight lens and the headlight housing.
- Compress the lens and headlight housing together.
- Wipe away any excess silicone from the headlight.
- Allow enough time for the silicone to cure.

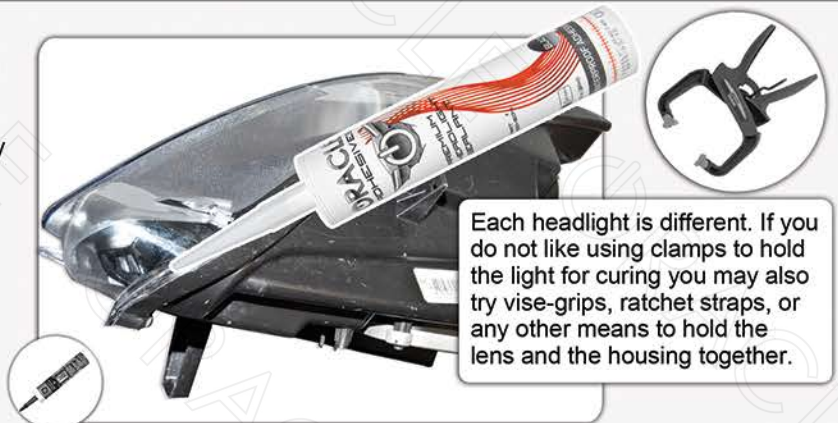

Each headlight is different. If you do not like using clamps to hold the light for curing you may also try vise-grips, ratchet straps, or any other means to hold the lens and the housing together.

WIRING THE HEADLIGHTS:

Option #1- Connect to the parking lights.

This is great if you have white or amber halos that you want to turn on and off by using the factory headlight switch. (Halos will stay on with the headlights).


Option #2- Wireless Controller.

Visit <https://www.oraclelights.com/collections/oracle-remotes-and-switches> to see the selection of controllers.

Option #3- Toggle Switch.

Visit <https://www.oraclelights.com/pages/halo-wiring-faq> to see diagrams.

WWW.ORACLELIGHTS.COM

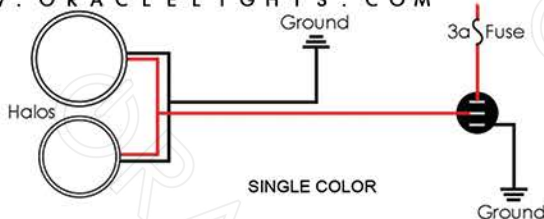

12V POWER

GROUND

CONTROLLER

COLORSHIFT



You Tube
SCAN TO WATCH
DIY Halo Install

