



M-6049-SD73A and M-6050-SD73A 7.3L Engine Family Cylinder Head

NO PART OF THIS DOCUMENT MAY BE REPRODUCED WITHOUT PRIOR AGREEMENT AND WRITTEN PERMISSION OF
FORD PERFORMANCE PARTS © Ford Motor Company 2020

PRIOR TO INSTALLATION READ THESE INSTRUCTION COMPETELY
For questions, Call the FORD PERFORMANCE Techline 1-800-367-3788

Please visit <https://www.performanceparts.ford.com> for warranty information

OVERVIEW:

This instruction sheet contains important information regarding the specifications for FPP part M-6049-SD73A and M-6050-SD73A.

CONTENTS/BILL OF MATERIALS:

Service Part Number	Description	Qty
M-6049-SD73A	Right Cylinder Head Assembly	1
	Or	
M-6050-SD73A	Left Cylinder Head Assembly	1

SPECIFICATIONS

Item	Specification
Head gasket surface flatness	0.025 mm (0.001 in) in any 25 mm (1 in) x 25 mm (1 in) area; 0.05 mm (0.002 in) in any 150 mm (6 in) x 150 mm (6 in) area; 0.1 mm (0.004 in) overall
Combustion chamber volume	3.8718 in ³ (63.447 cm ³)
Rocker arm ratio	1.8:1
Valve arrangement (front to rear) — LH	I-E-I-E-I-E-I-E
Valve arrangement (front to rear) — RH	E-I-E-I-E-I-E-I
Valve face runout — intake	0.002 in (.05 mm)
Valve face runout — exhaust	0.002 in (.05 mm)
Valve face angle — intake	45.5 –46 °
Valve face angle — exhaust	50.5 –51 °
Valve guide bore diameter	0.314 –0.315 in (7.975 –8.005 mm)
Valve head diameter — intake	2.160 –2.170 in (54.87 –55.13 mm)
Valve head diameter — exhaust	1.664 –1.674 in (42.27 –42.53 mm)
Valve seat width — intake	0.067 –0.079 in (1.7 –2 mm)
Valve seat width — exhaust	0.051 –0.063 in (1.3 –1.6 mm)
Valve seat angle — intake	44.5 –45.5 °
Valve seat angle — exhaust	49.5 –50.5 °
Valve stem diameter — intake	0.3123 –0.3131 in (7.933 –7.953 mm)
Valve stem diameter — exhaust	0.3119 –0.3126 in (7.921 –7.941 mm)
Valve stem-to-guide clearance — intake	0.0009 –0.0028 in (.022 –.072 mm)


Ford Factory Shop Manual purchase options www.motorcraftservice.com

NO PART OF THIS DOCUMENT MAY BE REPRODUCED WITHOUT PRIOR AGREEMENT AND WRITTEN PERMISSION OF
FORD PERFORMANCE PARTS © Ford Motor Company 2020

Item	Specification
Valve stem-to-guide clearance — exhaust	0.0013 –0.0033 in (.034 –.084 mm)
Valve spring free length — intake	2.6791 in (68.05 mm)
Valve spring free length — exhaust	2.8209 in (71.65 mm)
Valve spring installed height	2.3622 in (60 mm)
Valve spring installed pressure — intake	78.46 –86.55 lb (349 –385 N)
Valve spring installed pressure — exhaust	98.02 –107.01 lb (436 –476 N)
Valve spring compression pressure — intake	274.27 –299.90 lb (1,220 –1,334 N) @ 1.819 in
Valve spring compression pressure — exhaust	265.72 –289.10 lb (1,182 –1,286 N) @1.756 in

RECOMMENDED TORQUE VALUES

- Left Cylinder Head Installation:
Lightly oil head bolt threads. Install the LH cylinder head and hand start the new bolts.
Torque:
Stage 1: 22 lb.ft (30 Nm)
Stage 2: 44 lb.ft (60 Nm)
Stage 3: 74 lb.ft (100 Nm)
Stage 4: Tighten an additional : 90°
Stage 5: Tighten an additional : 90°

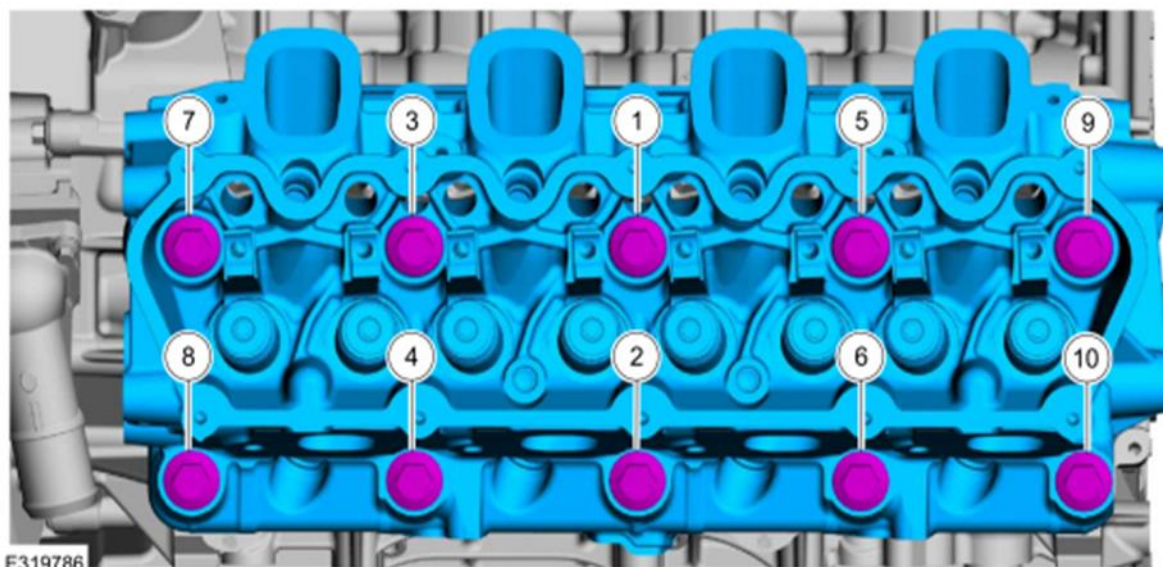

Ford Factory Shop Manual purchase options www.motorcraftservice.com

NO PART OF THIS DOCUMENT MAY BE REPRODUCED WITHOUT PRIOR AGREEMENT AND WRITTEN PERMISSION OF
FORD PERFORMANCE PARTS © Ford Motor Company 2020

2. Right Cylinder Head Installation:

Lightly oil head bolt threads. Install the RH cylinder head and hand start the new bolts.

Torque:


Stage 1: 22 lb.ft (30 Nm)

Stage 2: 44 lb.ft (60 Nm)

Stage 3: 74 lb.ft (100 Nm)

Stage 4: Tighten an additional : 90°

Stage 5: Tighten an additional : 90°

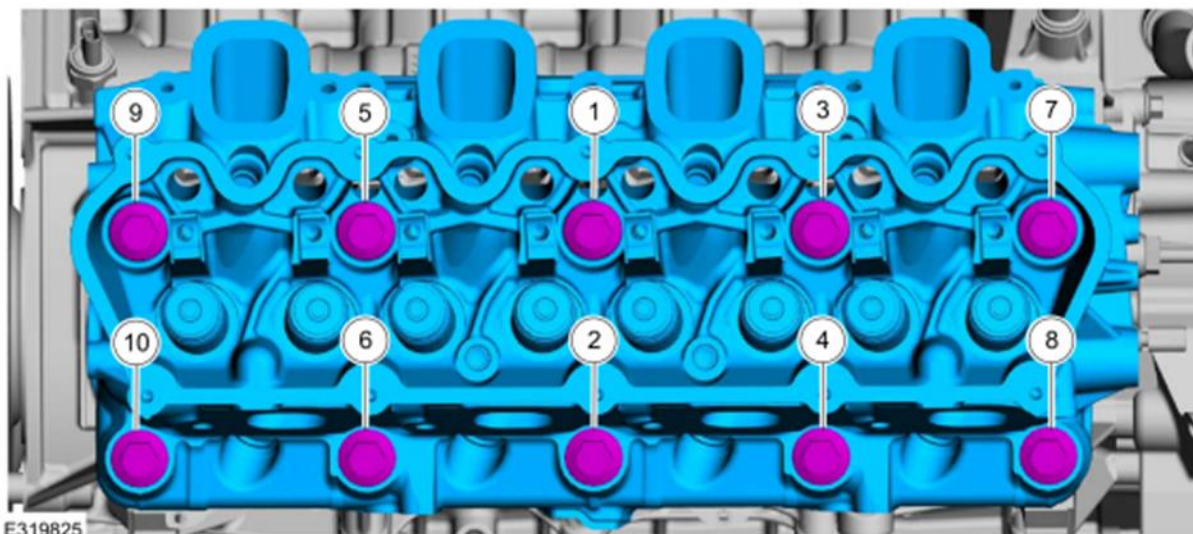

E319825