



### VHX-64F-FAL


Dakota Digital VHX Instrument Installation  
For 1964-'65 Ford Falcon, Ranchero, 64½-'65 Mustang Base Model

Your new VHX-64F-FAL kit includes:

#### VHX Display



#### Universal Sender Pack

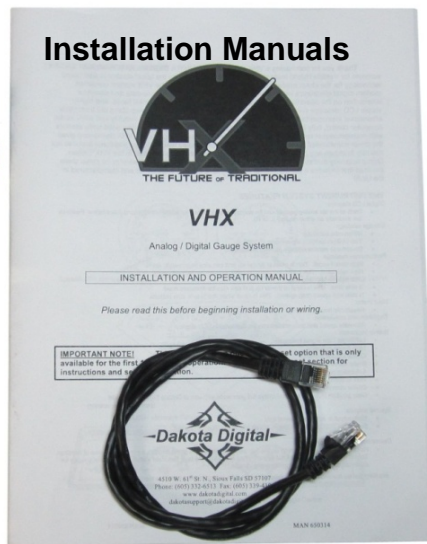

36" CAT5 Cable


(2X) 3/8" Screws



(2X) Mounting brackets



#### Control Box



#### Switch Harness



#### Ford Adapter



### Installation

1. Remove the stock gauge cluster from the dash and retain the factory hardware for reassembly.



2. Separate the bezel from the rest of the cluster by removing the seven screws on the backside. Retain six of these screws for reassembly.



3. With the bare bezel lying face down, fit the VHX system into place and secure it to the bezel using six original screws from disassembly.



4. Secure the angle mounting brackets to the bottom side of the VHX system using the supplied 3/8" screws while aligning the bracket to the bezel mounting hole. The brackets have a slot at each end for proper adjustment; the end with the shorter slot gets mounted to the VHX system.

End of bracket with shorter slot mounts to the VHX system using supplied 3/8" screw



Both brackets mounted to the bottom side of the VHX system




5. Attach the provided CAT5 cable and the 3 pin switch harness to the back of the VHX display. Carefully route the other ends to the control box mounting location. Use the diagram below for the wiring instructions of SW1 and SW2.



## SW1 and SW2 Connection:

This system comes with two switches located directly in the assembly to allow a convenient and easily accessible location for the control switches. To use these switches, the included switch harness (pictured at right) is plugged into the back of the assembly and the wires are connected to the VHX control box as follows:



Connect the ORANGE wire to SW1(-) on terminal on VHX control box.

Connect the GREEN wire to SW2(-) terminal on VHX control box.

Leave the BLUE wire unconnected.

6. Re-install the gauge cluster to the dash using the factory hardware while rechecking mounting bracket alignment. Refer to the main manual for wiring instructions to complete the VHX installation.



4510 W. 61<sup>st</sup> St. N., Sioux Falls SD 57107  
Phone: (605) 332-6513 Fax: (605) 339-4106  
www.dakotadigital.com  
dakotasupport@dakotadigital.com