




WWW.DAKOTADIGITAL.COM

VHX-69F-MUS

Dakota Digital VHX Instrument Installation
For 1969-'70 Ford Mustang

Your new VHX-69F-MUS kit includes:

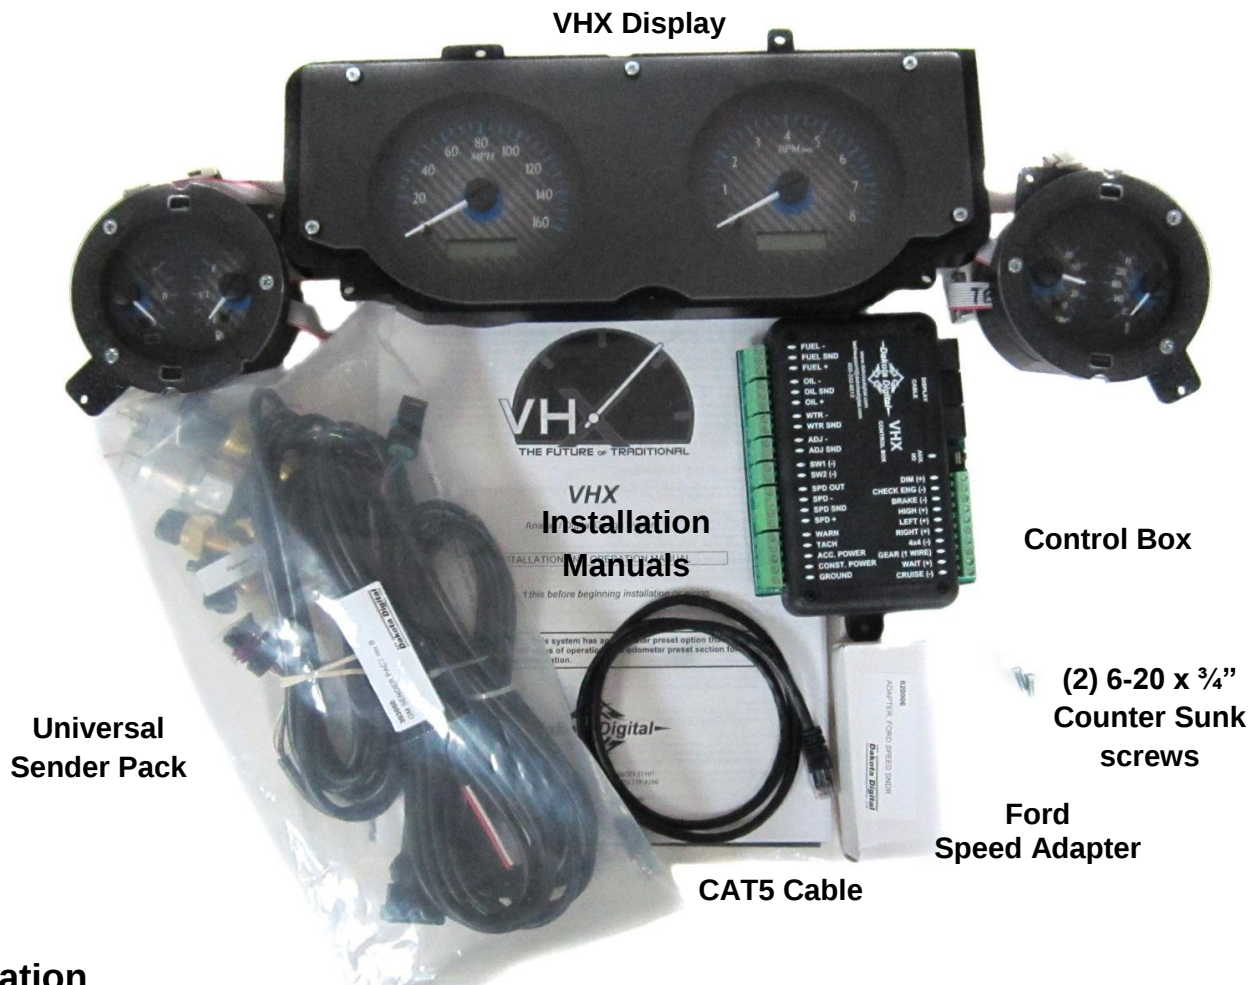

Installation

1. Remove the instrument system from the dashboard. Be sure to save the hardware for reassembly.



Manual # 650393




2. Remove the stock gauge cluster from the bezel and save the three separator pieces and the hardware for reassembly.

3. Reinstall the three separator pieces onto the bezel.




4. Align the VHX system on the separator pieces and use the stock hardware to secure to the bezel. The bottom two mounts of the Speed and Tach assembly will use the supplied 6-20 x 3/4" counter sunk screws as shown by the oversized arrows.

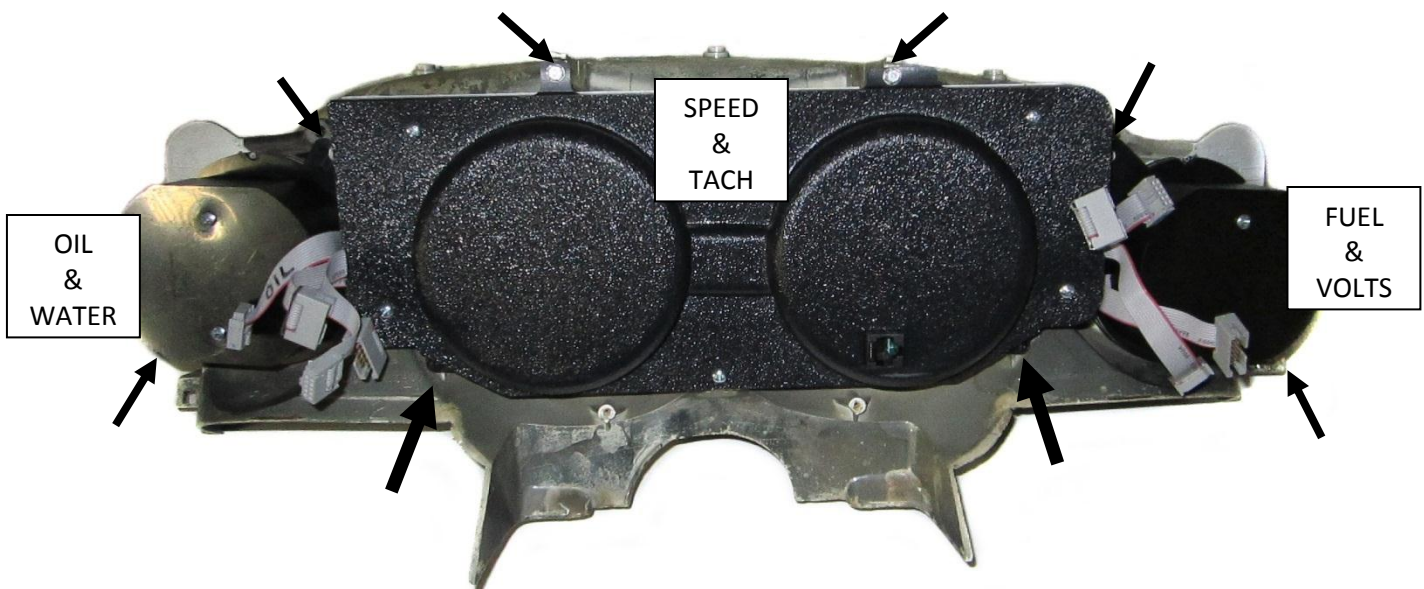

5. With the VHX system mounted to the bezel, the cluster should be secure on all sides with no movement.



7. Connect the ribbon cables with the appropriate labeled connector (black arrows) and also connect the CAT5 cable to the system (white arrow). As the assembled cluster is installed into the dash, take care when routing this cable to the control box to prevent damage.

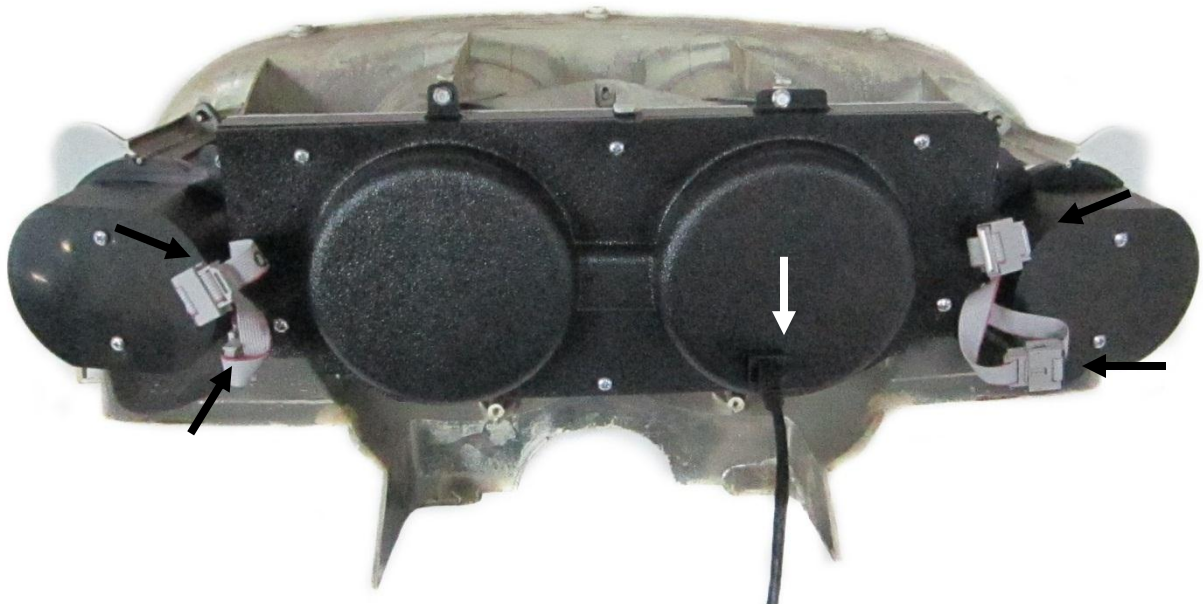

8. Reinstall the cluster into the vehicle using the original hardware and refer to the main manual for wiring instructions to complete the VHX installation.



4510 W. 61st St. N., Sioux Falls SD 57107
Phone: (605) 332-6513 Fax: (605) 339-4106
www.dakotadigital.com
dakotasupport@dakotadigital.com