



VHX-87F-MUS

Dakota Digital VHX Instrument Installation
For 1987-'89 Ford Mustang

Your new VHX-87F-MUS kit includes:

VHX Display



Installation Manuals




Ford Speed Adapter



Universal Sender Pack

(1) 36" CAT5 Cable

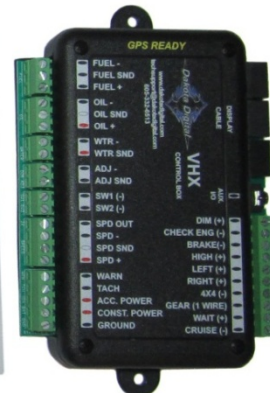


Control Box

Installation


1. Remove the stock gauge bezel from the dash and save all hardware for reassembly.



2. Remove the stock gauge cluster by removing the four screws holding the system to the dash structure; be sure to keep these screws as they will be re-used. Now is a good time to clean the bezel and dash pads.

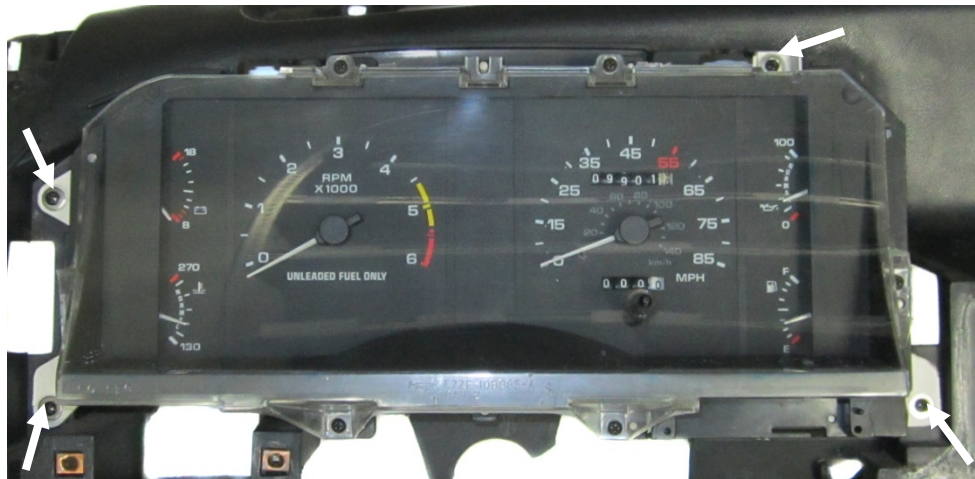

3. Connect the CAT5 cable to the back of the VHX cluster as it is installed into the dash, take care when routing the other end of this cable to the control box mounting location. Mount the VHX cluster to the dash structure using the four factory screws.

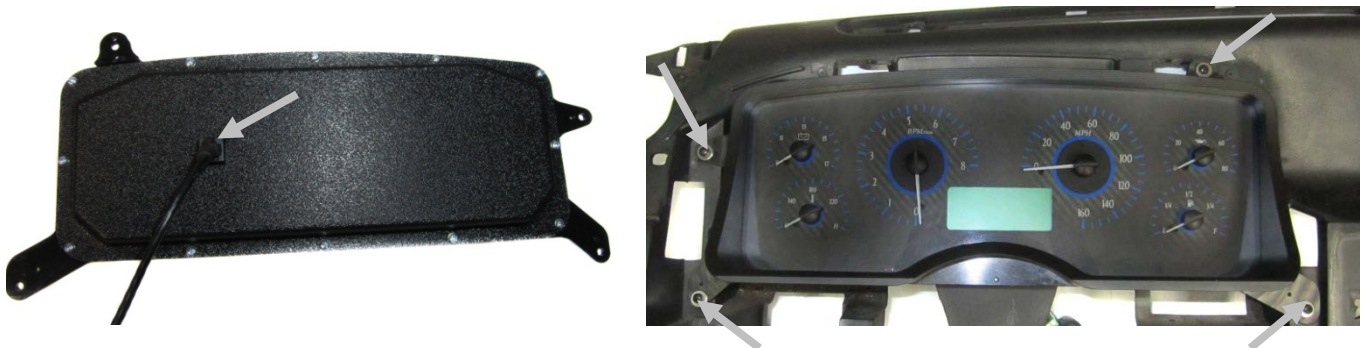

4. Refer to the main manual for wiring instructions to complete the VHX installation.



4510 W. 61st St. N., Sioux Falls SD 57107
Phone: (605) 332-6513 Fax: (605) 339-4106
www.dakotadigital.com
dakotasupport@dakotadigital.com