

Installation & CARE

2005-2009 FORD MUSTANG LIGHT BAR STYLE PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS

BEFORE INSTALLATION:

- If you experience any difficulties that the instructions did not cover, please seek assistance at a local automotive shop.
- Please wear proper protective equipment before you work on any vehicle.
- An assistant is recommended when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

TOOLS AND SUPPLIES REQUIRED

1/4" Ratchet	Phillips Screwdriver	10 mm socket	Plastic Pry bar
			
Trim Pad Remover			
			

PRODUCT NUMBER

LHP-MST05-G2-TM
LHP-MST05JM-G2-TM
LHP-MST05G-G2-TM




LET'S START THE INSTALLATION



STEP 1

Remove the six plastic clips

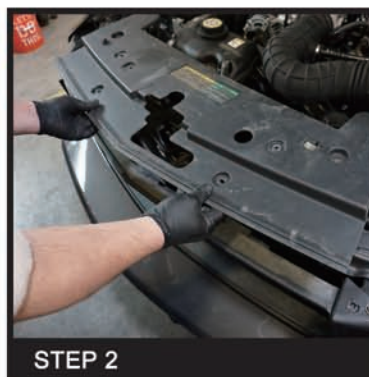

STEP 2

Remove the plastic radiator cover



STEP 3

Remove the three Phillips screws and two plastic clips on the wheel inner liner cover



STEP 4

Remove the two front bumper light sockets and two 10mm front bumper mounting nuts



STEP 5

Remove the 10mm bumper mounting bolt at the top of the front bumper




STEP 6

Pull down on the side of the front bumper to unseat the front bumper



STEP 7

Unseat the top of the front bumper



STEP 8

Please repeat the steps from 3 to 7 for the opposite side



STEP 9

Remove the front bumper



STEP 10

Remove the two 10mm headlight mounting bolts at the bottom of the headlight



STEP 11

Remove one 10mm headlight mounting bolt at the top of the headlight




STEP 12

Disconnect the headlight harness and remove the factory headlight housing



STEP 13

Connect the headlight harness

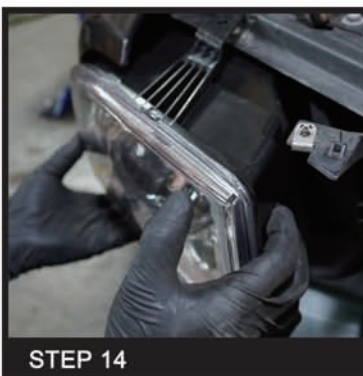

STEP 14

Seat the new headlight assembly in place



STEP 15

Reinstall one 10mm headlight mounting bolt at the top of the headlight



STEP 16

Reinstall the two 10mm headlight mounting bolts at the bottom of the headlight




STEP 17

Install the wire connector to connect the LED light bar wires to the car position light



STEP 18

Please repeat the steps from 9 to 16 for the opposite side

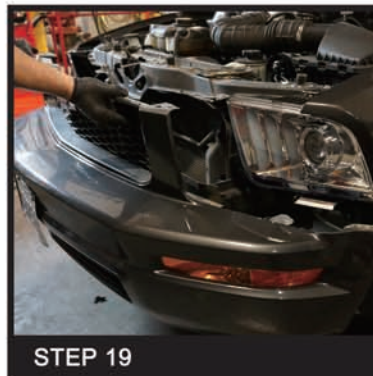

STEP 19

Reinstall the front bumper



STEP 20

Reinstall the 10mm bumper mounting bolt at the top of the front bumper



STEP 21

Reinstall the two front bumper light sockets and two 10mm front bumper mounting nuts



STEP 22

Reinstall the three phillips screws and two plastic clips on the wheel inner liner cover



STEP 23

Please repeat the steps from 20 to 22 for the opposite side



STEP 24

Reinstall the plastic radiator cover



STEP 25

Reinstall the six plastic clips



STEP 26

Close the hood to complete installation

Installation & CARE

SPEC-D
Tuning

INNOVATE

PERFECTIONAL

SERVICE

2005-2009 FORD MUSTANG LIGHT BAR STYLE PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS

BEFORE INSTALLATION:

- If you experience any difficulties that the instructions did not cover, please seek assistance at a local automotive shop.
- Please wear proper protective equipment before you work on any vehicle.
- An assistant is recommended when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

2005-2009 FORD MUSTANG LIGHT BAR STYLE PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS

High / Low Beam Adjustment Screws

